


Abrasive film, active coated, self fastening

FP 73 WK

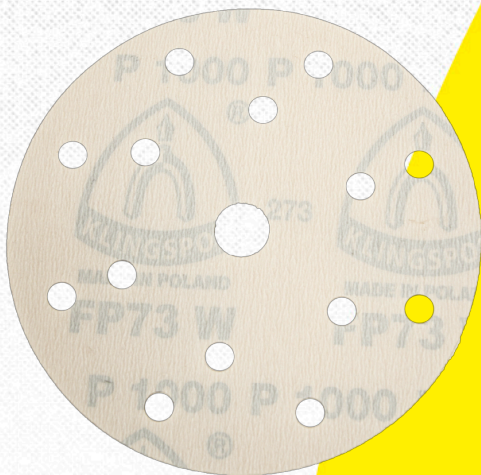

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Foil

Product benefit

Special product with highly tear-resistant film backing for use on paint, varnish and fillers - Very good adaptation of the discs with excellent grit adhesion also in the edge area - Substantially reduced clogging and significantly longer service life

Materials

Paint/Varnish/Filler	●
Plastic	●

Applications

- ▶ Automotive industry
- ▶ Vehicle maintenance
- ▶ Paint shops
- ▶ Wood processing industry
- ▶ Furniture industry
- ▶ Boat and shipbuilding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
150	240	○ 0	FP 73 WK	100	322397
150	80	⊗ GLS 47	FP 73 WK	100	320641
150	100	⊗ GLS 47	FP 73 WK	100	320642
150	120	⊗ GLS 47	FP 73 WK	100	320643

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany
 Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
 sales@klingspor.de - www.klingspor.de



Diameter in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
150	150	⊗ GLS 47	FP 73 WK	100	320644
150	180	⊗ GLS 47	FP 73 WK	100	320725
150	240	⊗ GLS 47	FP 73 WK	100	320726
150	320	⊗ GLS 47	FP 73 WK	100	320727
150	400	⊗ GLS 47	FP 73 WK	100	320728
150	600	⊗ GLS 47	FP 73 WK	100	320729
150	800	⊗ GLS 47	FP 73 WK	100	320730
150	1200	⊗ GLS 47	FP 73 WK	100	320732

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

